


NOTES:

- UNIT CONSTRUCTED OF 16 GA TYPE 304 STAINLESS STEEL WITH A #4 FINISH (316L OPTIONAL)
- WIRING TO MEET LATEST NEC CODES
- ALL ELECTRICAL COMPONENTS TO BE UL RECOGNIZED
- UNIT SHIPS COMPLETE AND READY FOR USE

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

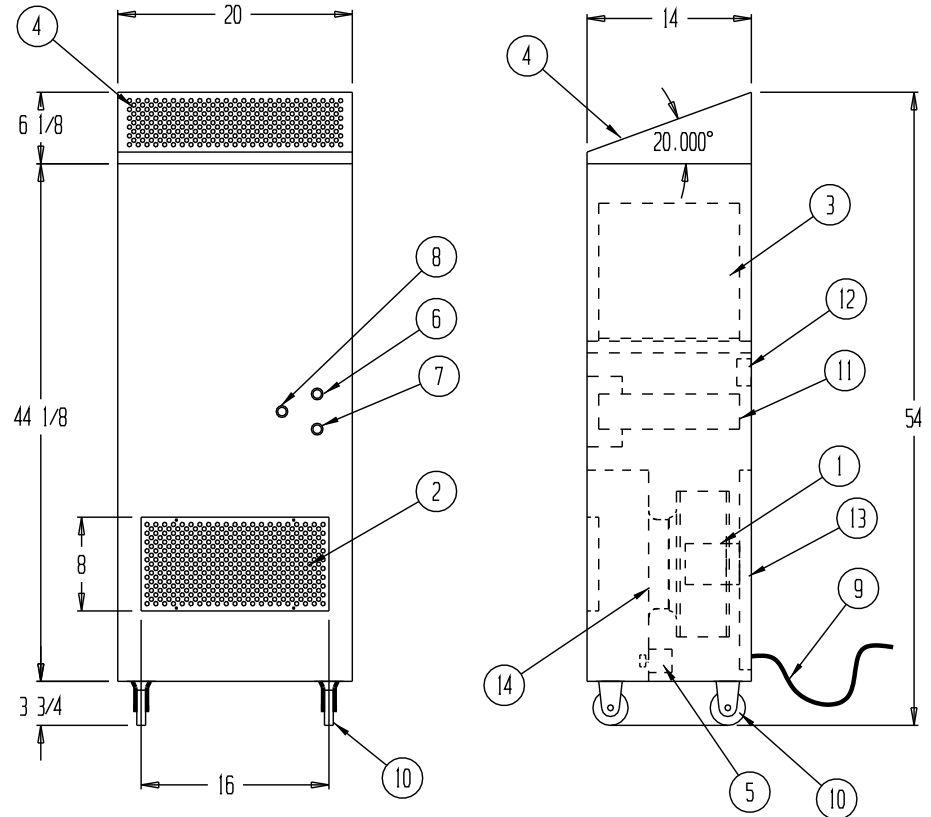

- ① 310mm BACKWARD CURVED IMPELLER BLOWER CAPABLE OF 800 CFM @ 1.0" WC. 115 VOLT, 2.4 AMPS
- ② 16" X 8" AIR INTAKE GRILL WITH 1" THICK WASHABLE FOAM PRE FILTER
- ③ 12" X 18" X 11-1/2" HIGH CAPACITY ULPA FILTER 99.9995% EFFECTIVE ON PARTICLES OF 0.12 MICRONS IN SIZE
- ④ REMOVABLE PERFORATED SLOPED TOP FOR FILTER SERVICE ACCESS
- ⑤ ELECTRONIC BLOWER SPEED CONTROL
- ⑥ BLOWER CONTROL SWITCH WITH INDICATOR LIGHT
- ⑦ GERMICIDAL UV LIGHT CONTROL SWITCH WITH INDICATOR (OPTIONAL)
- ⑧ FILTER CHANGE INDICATOR LIGHT (OPTIONAL)
- ⑨ 8 FT 115 VOLT, 15 AMP POWER CORD
- ⑩ 3" DIA LOCKING SWIVEL CASTERS
- ⑪ GERMICIDAL UV LIGHT (OPTIONAL)
- ⑫ PRESSURE SWITCH FOR FILTER LOADING (OPTIONAL)
- ⑬ REMOVABLE BLOWER SERVICE ACCESS PANEL
- ⑭ GUARDED BLOWER INLET

DRAWN FOR		HALE & HALCO COMPANY, INC. 100 NO. GORDON STREET ELK GROVE, IL. 60007		
		TITLE SA800-SS		
DRAWN BY DK	SIZE JOB NO. ---	ENG. NO. 192208580	REV	
APPROVED BY	SCALE 1"=1'	DATE	SHEET	