


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

PRESSURE DROP VS. FACE VELOCITY  
HEPA FILTER 2" THK., 99.99% @ 0.3 MICRONS

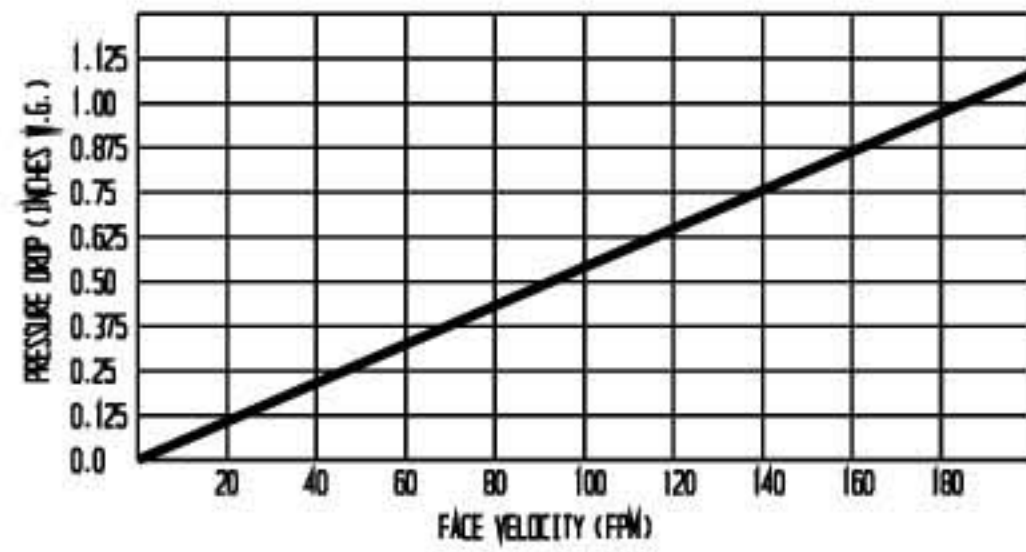

AIR CONTROL DAMPER WITH SCREWDRIVER  
ADJUSTMENT THROUGH CENTER PORT ON FILTER

(4) MODULE HANGING TABS

(2) FILTER JACKING BARS

HEPA FILTER

ANODIZED ALUMINUM PROTECTIVE GRILLE  
1/8" DIA. HOLE ON 3/16" STAGGERED  
CENTERS. (40% OPEN AREA)

4" DIA. STARTER COLLAR

14 GA. MILL FINISH  
ALUMINUM HOUSING

SUPPORT TABS

7 3/4 X 7 3/4 X 3" HEPA-FILTER, 99.99%  
EFFECTIVE ON PARTICLES OF 0.3 MICRONS  
OR LARGER, TO INCLUDE:  
- ALUMINUM FRAME  
- 1 EA. DOP TEST PORT  
- 1 EA. DAMPER ADJUSTMENT PORT  
- NEOPRENE GASKET SEAL

1/4 X 20 GRILLE SCREWS

PERFORATED ANODIZED ALUMINUM  
PROTECTIVE GRILLE WITH 1/8" DIA.  
HOLES ON 3/16" STAGGERED CENTERS,  
PROVIDING A 40% OPEN AREA

DRAWN FOR		<b>HALCO PRODUCTS CO.</b> 100 NO. GORDON STREET ELK GROVE, IL. 60007		
		TITLE VF1212-2 LO/AL/D4		
DRAWN BY	TM	SIZE	JOB NO.	DWG NO.
				1712719BA
APPROVED BY		SCALE	DATE	SHEET
		NONE	5-13-10	